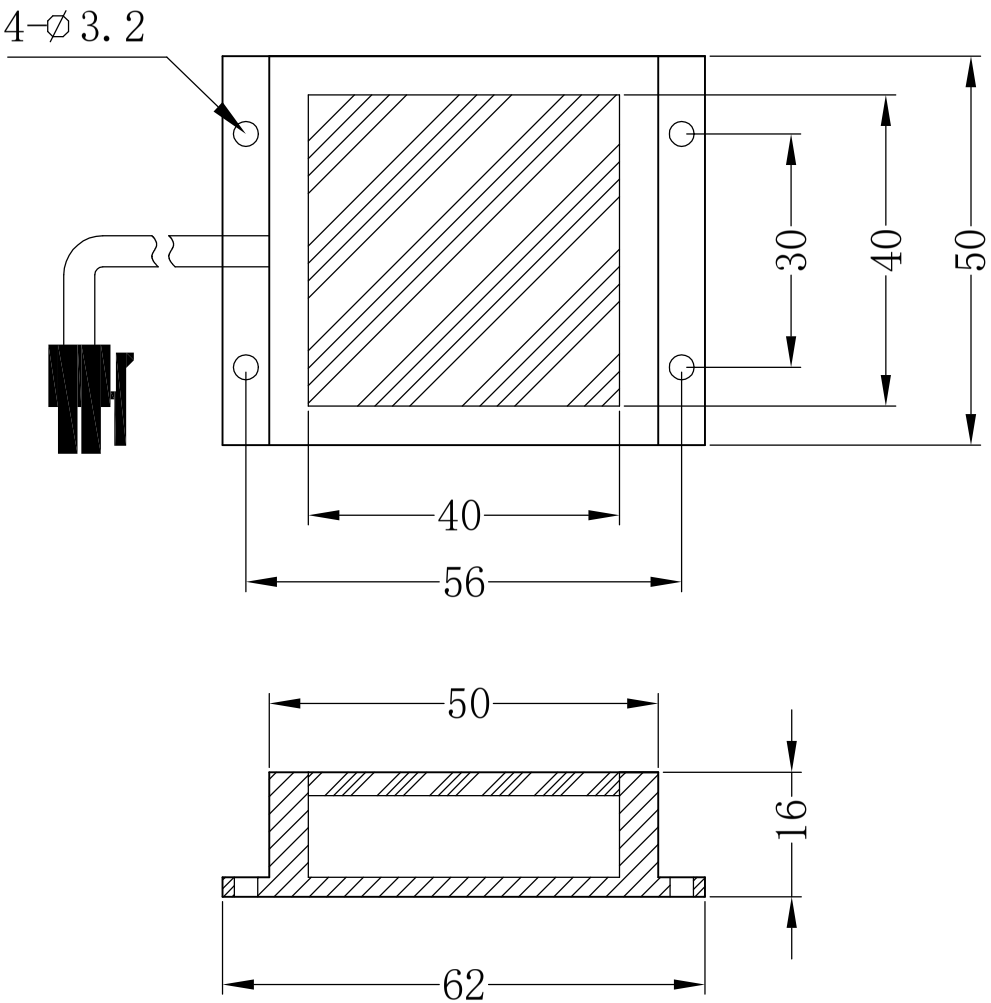

SPECIFICATIONS PARAMETER	
OPERATING VOLTAGE	DC24-26V
RATED CURRENT	IR、R/W、G、B 100/120mA
RATED POWER	IR、R/W、G、B 2.4/2.9W
PEAK CURRENT	IR、R/W、G、B 180/220mA
PEAK POWER	IR、R/W、G、B 4.3/5.3W
WAVELENGTH OF LIGHT	IR 850 nm
	R 620-625nm
	G 520-530nm
	B 465-470nm
	W 6500-7000K

Wellinvision

PART NAME	HL-BK-40-40		DATE	2013-9-07
			DWN. BY	
UNIT: mm	TITLE	DRAWING LAYOUT	CHKD. BY	
			APPD. BY	
			DWG. NO	