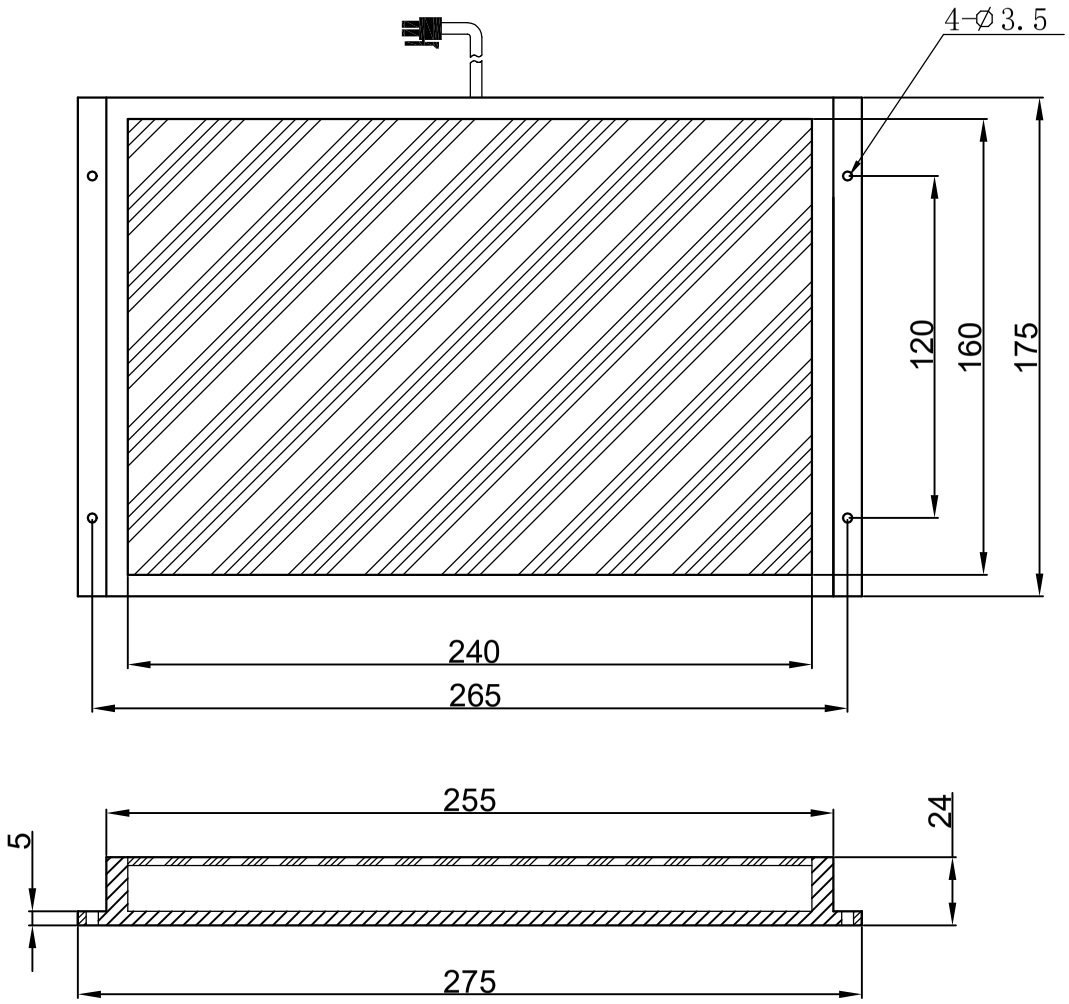


| SPECIFICATIONS PARAMETER | |
|---|---|
| OPERATING VOLTAGE | DC24-26V |
| RATED CURRENT | IR、R/W、G、B、V<br>720/1080mA |
| RATED POWER | IR、R/W、G、B、V<br>17.28/25.92W |
| PEAK CURRENT | IR、R/W、G、B、V<br>1.44/2.16A |
| PEAK POWER | IR、R/W、G、B、V<br>34.56/51.84W |
| WAVELENGTH OF LIGHT | IR 850 nm |
| | R 620-625nm |
| | G 520-530nm |
| | B 465-470nm |
| | W 6500-7000K |

Wellinvision

| | | | | |
|---|---|---|---|---|
| PART NAME | HL-BK-160-240 | | DATE | 2015-7-6 |
| | | | DWN. BY | |
| UNIT: mm | TITLE | DRAWING LAYOUT | CHKD. BY | |
| | | | APPD. BY | |
| | | | DWG. NO | |