


4-M3 depth 4
P.C.D 50

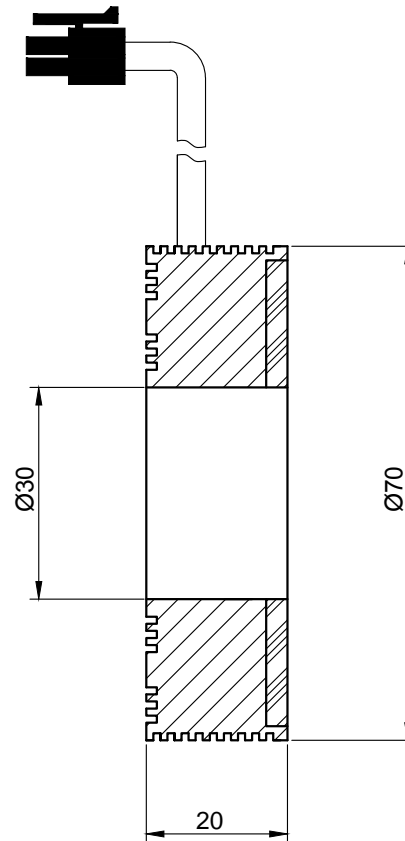

SPECIFICATIONS PARAMETER	
OPERATING VOLTAGE	DC24-26V
RATED CURRENT	IR、R / W、G、B 120/180mA
RATED POWER	IR、R / W、G、B 2.88/4.32W
PEAK CURRENT	IR、R / W、G、B 240/360mA
PEAK POWER	IR、R / W、G、B 5.76/8.64W
WAVELENGTH OF LIGHT	IR 850-940nm
	R 620-625nm
	G 520-530nm
	B 465-470nm
	W 6500-7000K

wellinvision

PART NAME	HL-RD0-70-3	DATE	2013-9-23
UNIT: mm	TITLE	DRAWING LAYOUT	CHKD. BY
			APPD. BY
			DWG. NO