


4-M3 depth 4
P. C. D 50

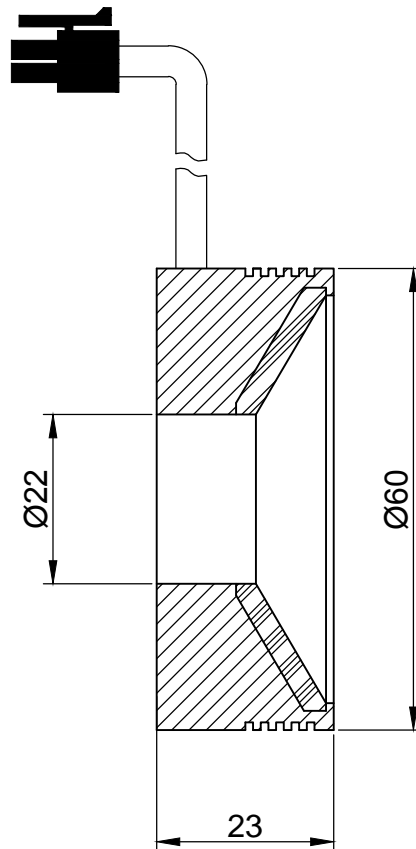

SPECIFICATIONS PARAMETER	
OPERATING VOLTAGE	DC24-26V
RATED CURRENT	R+G+B 100+150+150mA
RATED POWER	R+G+B 2.4+3.6+3.6W
PEAK CURRENT	R+G+B 200+300+300mA
PEAK POWER	R+G+B 4.8+7.2+7.2W
WAVELENGTH OF LIGHT	R 620-625nm
	G 520-530nm
	B 465-470nm

 **Wellinvision**

PART NAME	HL-RD30-60-3RGB		DATE	2016-12-28
			DWN. BY	
UNIT: mm	TITLE	DRAWING LAYOUT		CHKD. BY
			APPD. BY	
			DWG. NO	