


4-M3 depth 5  
P.C.D 160

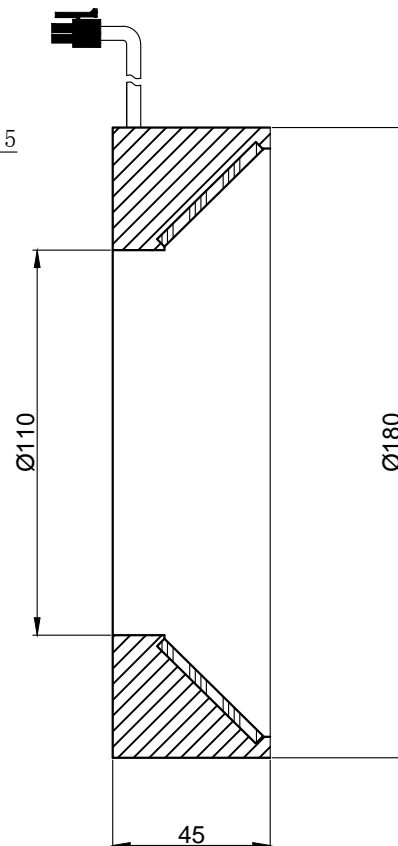

SPECIFICATIONS PARAMETER	
OPERATING VOLTAGE	DC24-26V
RATED CURRENT	IR, R / W, G, B 700/1000mA
RATED POWER	IR, R / W, G, B 16.8/24W
PEAK CURRENT	IR, R / W, G, B 1400/2000mA
PEAK POWER	IR, R / W, G, B 37.6/48W
WAVELENGTH OF LIGHT	IR 850-940nm
	R 620-625nm
	G 520-530nm
	B 465-470nm
	W 6500-7000K

**wellinvision**

PART NAME	HL-RD45-180-6	DATE	2013-11-29
UNIT: mm	TITLE	DRAWING LAYOUT	CHKD. BY
			APPD. BY
			DWG. NO