

1

2

3

4

5

6

7

D

D

C


C

B

B

A

A

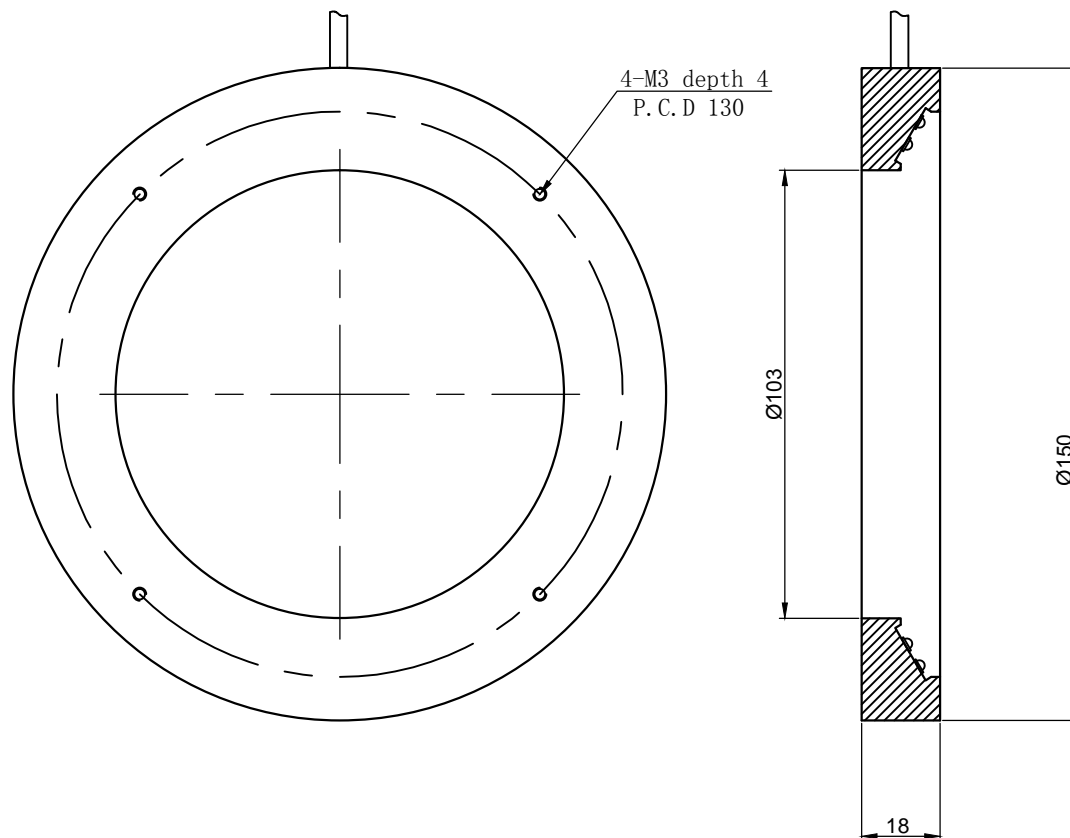

## SPECIFICATIONS PARAMETER

|                     |                     |
|---------------------|---------------------|
| OPERATING VOLTAGE   | DC48V               |
| RATED CURRENT       | R/W,G,B<br>3/4A     |
| RATED POWER         | R/W,G,B<br>144/192W |
| PEAK CURRENT        | R/W,G,B<br>12/16A   |
| PEAK POWER          | R/W,G,B<br>288/384W |
| WAVELENGTH OF LIGHT | R 620-630nm         |
|                     | G 520-530nm         |
|                     | B 465-470nm         |
|                     | W 6500-7000K        |



|           |               |                |          |          |
|-----------|---------------|----------------|----------|----------|
| PART NAME | HL-RH30-150-2 |                | DATE     | 2014-5-3 |
|           |               |                | DWN. BY  |          |
| UNIT: mm  | TITLE         | DRAWING LAYOUT | CHKD. BY |          |
|           |               |                | APPD. BY |          |
|           |               |                | DWG. NO  |          |

1

2

3

4

5

6

7