

1 2 3 4 5 6 7

D

D

C


C

B


B

A

A

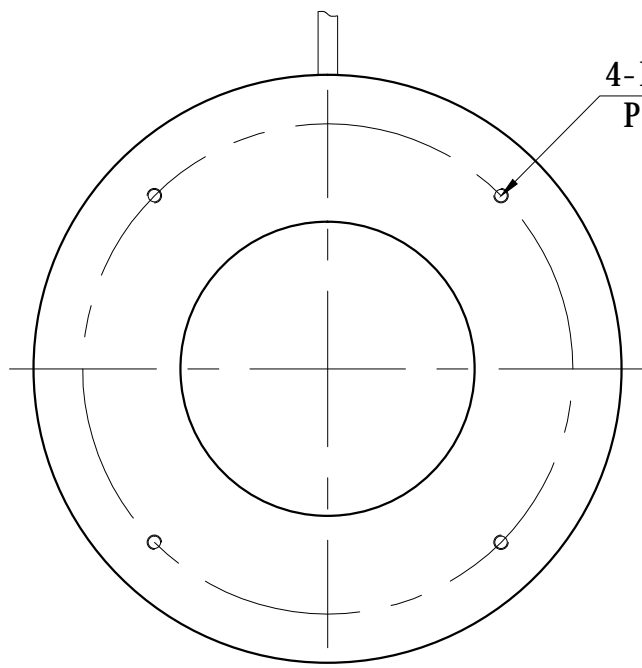

4-MB depth 4
P.C.D 100

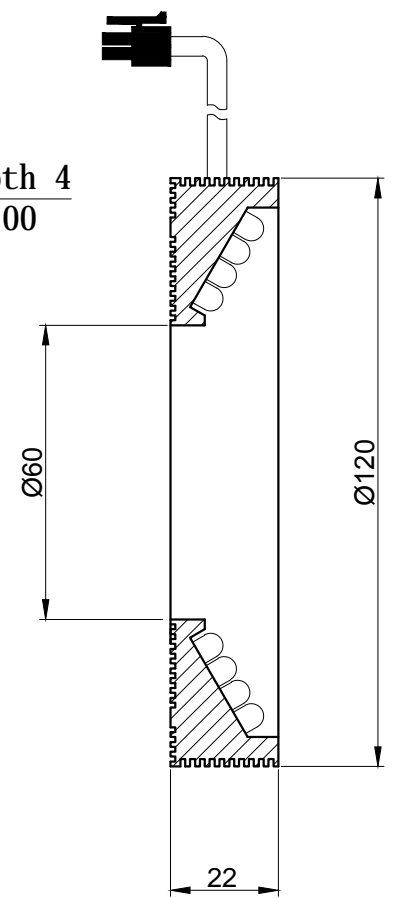

SPECIFICATIONS PARAMETER	
OPERATING VOLTAGE	DC24-26V
RATED CURRENT	400mA
RATED POWER	9.6W
PEAK CURRENT	800mA
PEAK POWER	19.2W
WAVELENGTH OF LIGHT	UV 375nm

	PART NAME		HL-R30-120-4-UV		DATE	2015-9-11
					DWN. BY	
	UNIT: mm	TITLE	DRAWING LAYOUT		CHKD. BY	
					APPD. BY	
					DWG. NO	

1 2 3 4 5 6 7