


SPECIFICATIONS PARAMETER

| SPECIFICATIONS PARAMETER | |
|--------------------------|-----------------------------|
| OPERATING VOLTAGE | DC24-26V |
| RATED CURRENT | IR、R /W、G、B、V 160 /200mA |
| RATED POWER | IR、R /W、G、B、V 3.6/4.8W |
| PEAK CURRENT | IR、R /W、G、B、V 300/380mA |
| PEAK POWER | IR、R /W、G、B、V 7.2/9.2W |
| WAVELENGTH OF LIGHT | IR 940nm、830 nm |
| | R 620-625nm |
| | G 520-530nm |
| | B 465-470nm |
| | V 365-400nm |
| | W 6500-8000K |

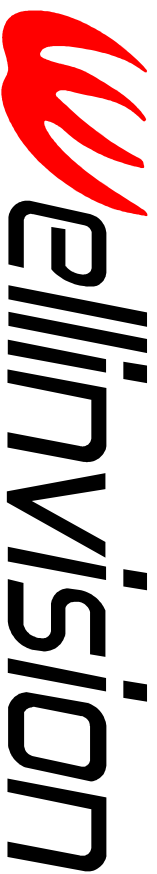

| | | | |
|----------------|----------------|------------|--|
| PART NAME | | DATE | |
| HL-R0-70-3-B-F | | 2016-10-12 | |
| UNIT: mm | TITLE | DWN. BY | |
| | DRAWING LAYOUT | CHKD. BY | |
| | | APPD. BY | |
| | | DWG. NO | |