

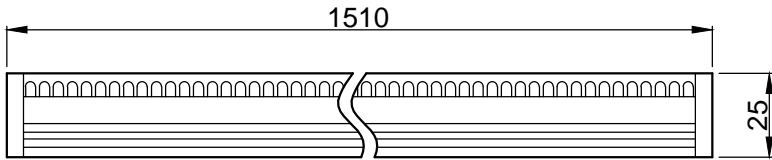



1 2 3 4 5 6 7

D
C
B
A

D
C
B
A

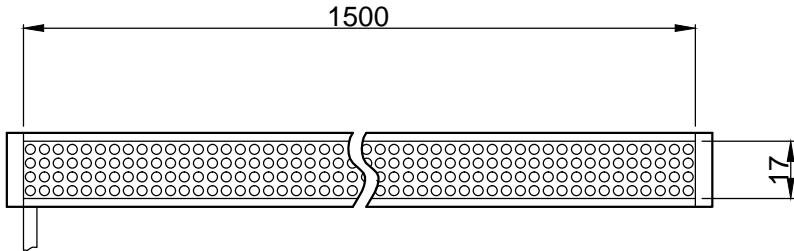

4-M3 depth 5mm

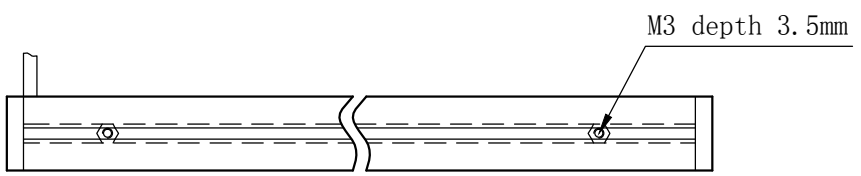

SPECIFICATIONS PARAMETER	
OPERATING VOLTAGE	DC24-26V
RATED CURRENT	IR, R / W, G, B 1.5/2A
RATED POWER	IR, R / W, G, B 36/48W
PEAK CURRENT	IR, R / W, G, B 3/4A
PEAK POWER	IR, R / W, G, B 72/96W
WAVELENGTH OF LIGHT	IR 850-940nm
	R 620-625nm
	G 520-530nm
	B 465-470nm
	W 6500-8000K



PART NAME	HL-LN-1500		DATE	2013-10-24
UNIT: mm	TITLE	DRAWING LAYOUT	DWN. BY	
			CHKD. BY	
			APPD. BY	
			DWG. NO	

1 2 3 4 5 6 7