

4-M3 depth 5mm

M3 depth 3.5mm

700mm

75

25

85

30


30

16

8

SPECIFICATIONS PARAMETER

| | |
|---------------------|--------------------------|
| OPERATING VOLTAGE | DC24-28V |
| RATED CURRENT | R /W, G, B 180/270mA |
| RATED POWER | R /W, G, B 4.32/6.48W |
| PEAK CURRENT | |
| PEAK POWER | |
| WAVELENGTH OF LIGHT | R 620-625nm |
| | G 520-530nm |
| | B 465-470nm |
| | W 6500-8000K |

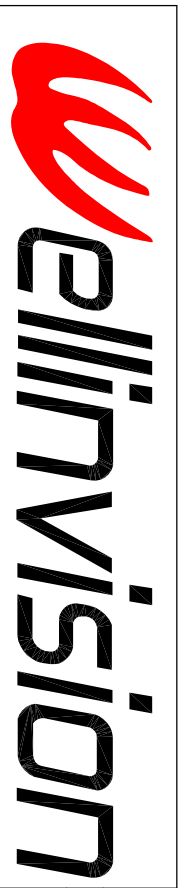

| | | | | | | |
|-----------|-------|-------------------|---------|---------|----------|-----------|
| PART NAME | | HL-LWDH-75 | | DATE | | 2013-9-23 |
| UNIT : mm | TITLE | DRAWING LAYOUT | DWN. BY | CHD. BY | APPD. BY | DWG. NO |