

1

2

3

4

5

6

7


D

C

B

A

6-Ø 4.2mm

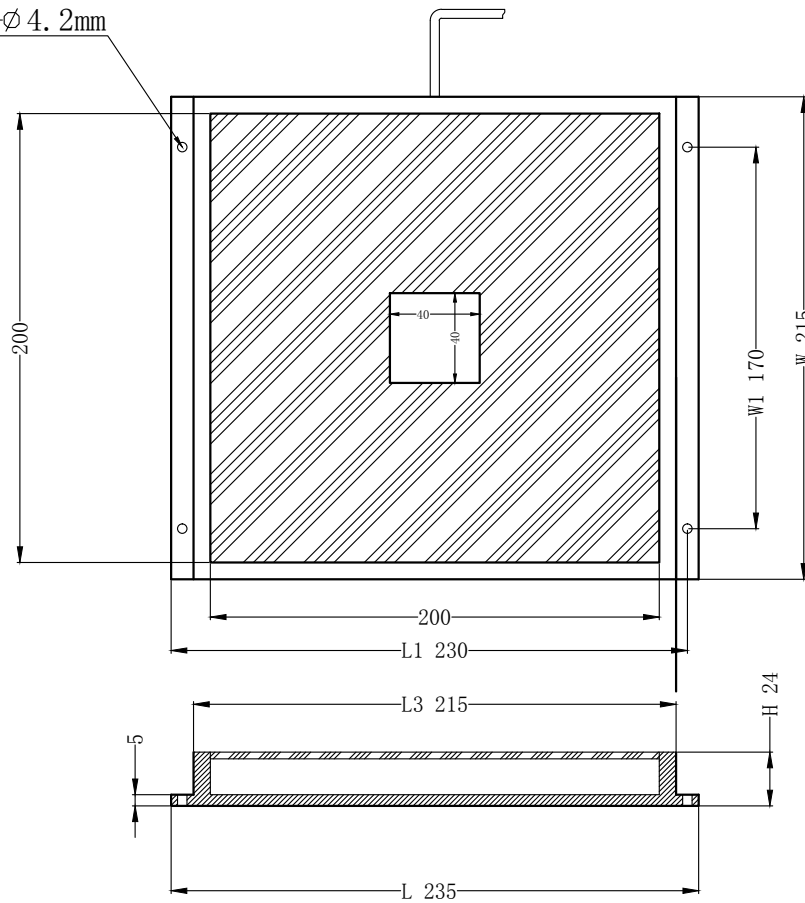

SPECIFICATIONS PARAMETER	
OPERATING VOLTAGE	DC24-26V
RATED CURRENT	IR, R / W, G, B, V 1.5/2.0A
RATED POWER	IR, R / W, G, B, V 36/48W
PEAK CURRENT	IR, R / W, G, B, V 3/4A
PEAK POWER	IR, R / W, G, B, V 72/96W
WAVELENGTH OF LIGHT	IR 850nm
	R 620-625nm
	G 520-530nm
	B 465-470nm
	V 365-400nm
	W 6500-7000K



PART NAME	HL-BKH-200-200- (40-40)	DATE	2014-6-24
UNIT: mm	TITLE	DRAWING LAYOUT	DWN. BY
			CHKD. BY
			APPD. BY
			DWG. NO

1

2

3

4

5

6

7