

1

2

3

4

5

6

7

D

D

C


C

B

B

A

A

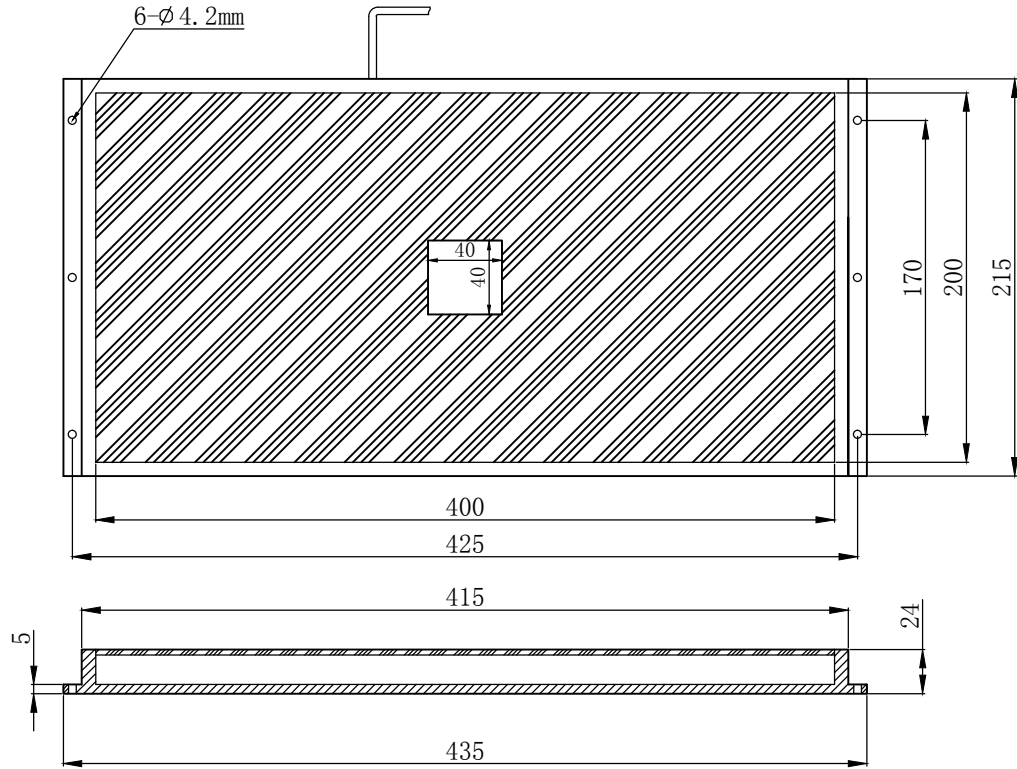

SPECIFICATIONS PARAMETER	
OPERATING VOLTAGE	DC24-26V
RATED CURRENT	IR, R / W, G, B, V 1.6/2A
RATED POWER	IR, R / W, G, B, V 38.4/48W
PEAK CURRENT	IR, R / W, G, B, V 3.2/4A
PEAK POWER	IR, R / W, G, B, V 76.8/96W
WAVELENGTH OF LIGHT	IR 850 nm
	R 620-625nm
	G 520-530nm
	B 465-470nm
	W 6500-7000K



PART NAME	HL-BK-200-400-H(40-40)	DATE	2016-03-18
UNIT: mm	TITLE	DRAWING LAYOUT	CHKD. BY
			APPD. BY
			DWG. NO

1

2

3

4

5

6

7