


1 2 3 4 5 6 7

D
C
B
A

D
C
B
A

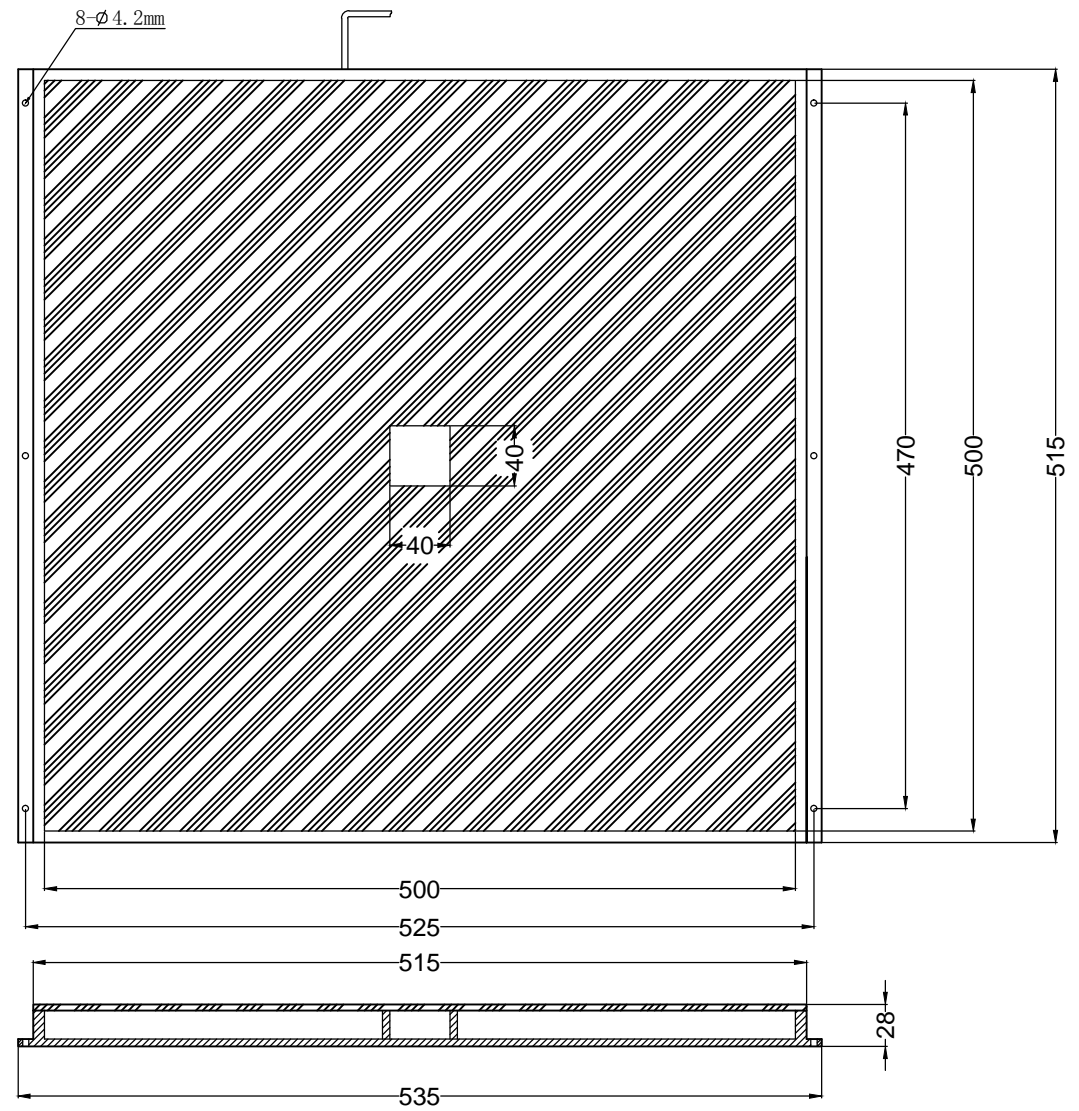

SPECIFICATIONS PARAMETER	
OPERATING VOLTAGE	DC24-26V
RATED CURRENT	IR, R / W, G, B, V 4/5A
RATED POWER	IR, R / W, G, B, V 96/120W
PEAK CURRENT	IR, R / W, G, B, V 8/10A
PEAK POWER	IR, R / W, G, B, V 192/240W
WAVELENGTH OF LIGHT	IR 850 nm
	R 620-625nm
	G 520-530nm
	B 465-470nm
	W 6500-7000K



PART NAME	HL-BK-500-500-H(40-40)	DATE	2016-10-31
UNIT: mm	TITLE	DRAWING LAYOUT	DWN. BY
			CHKD. BY
			APPD. BY
			DWG. NO

1 2 3 4 5 6 7