


1 2 3 4 5 6 7



D

D

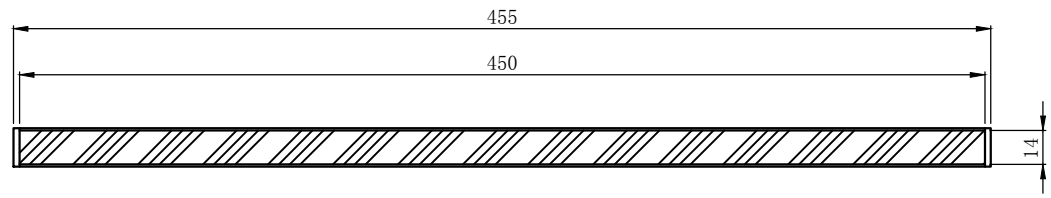

C

C

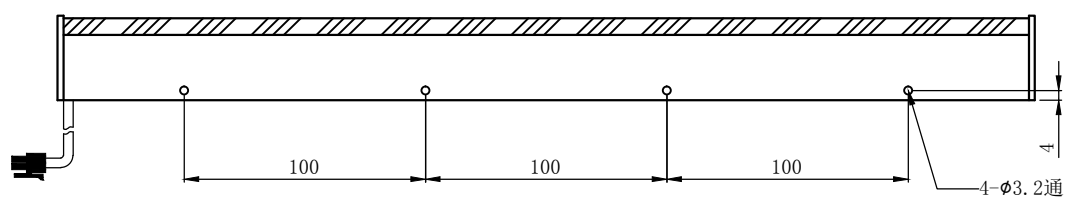

B

B

SPECIFICATIONS PARAMETER

OPERATING VOLTAGE	DC24-26V	WAVELENGTH OF LIGHT		
RATED CURRENT	R/W, G, B, V 900/1350A		R	620-625nm
RATED POWER	R/W, G, B, V 21.6/32.4W		G	520-530nm
PEAK CURRENT	R/W, G, B, V 1.8/2.7A		B	465-470nm
PEAK POWER	R/W, G, B, V 43.2/64.8W		V	365-400nm
			W	6500-7000K

A

A



PART NAME	HL-HL16D-450	DATE	2015-11-25
UNIT: mm	TITLE	DRAWING LAYOUT	DWN. BY
			CHKD. BY
			APPD. BY
			DWG. NO

1 2 3 4 5 6 7