


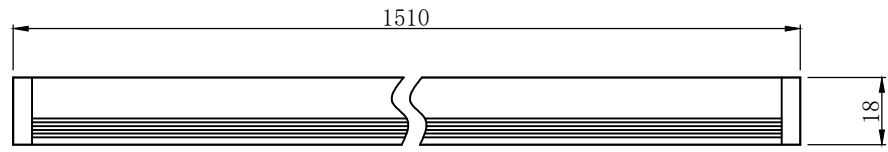


1 2 3 4 5 6 7

D  
C  
B  
A

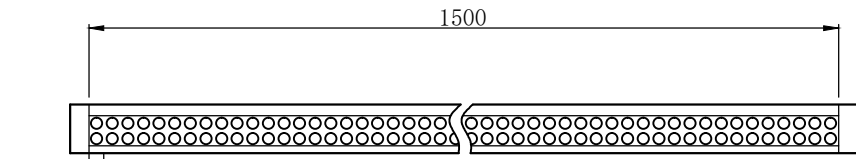

4-M3 depth 5mm

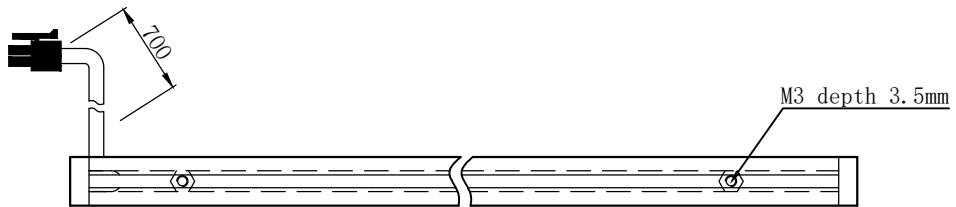

SPECIFICATIONS PARAMETER	
OPERATING VOLTAGE	DC24-26V
RATED CURRENT	IR, R/W, G, B 750/1100mA
RATED POWER	IR, R/W, G, B 18/26.4W
PEAK CURRENT	IR, R/W, G, B 1.5/2.2A
PEAK POWER	IR, R/W, G, B 36/52.8W
WAVELENGTH OF LIGHT	IR 850-940nm
	R 620-625nm
	G 520-530nm
	B 465-470nm
	W 6500-8000K



PART NAME	HL-LS-1500		DATE	2016-1-18
UNIT: mm	TITLE	DRAWING LAYOUT	DWN. BY	
			CHKD. BY	
			APPD. BY	
			DWG. NO	

1 2 3 4 5 6 7