

1

2

3

4

5

6

7

D

D

C


C

B



B

A

A

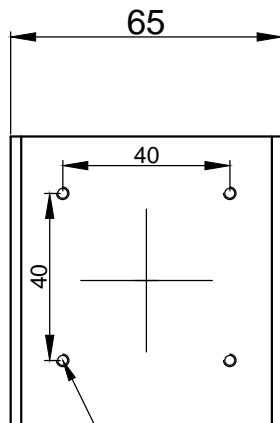

8-M3 depth 5

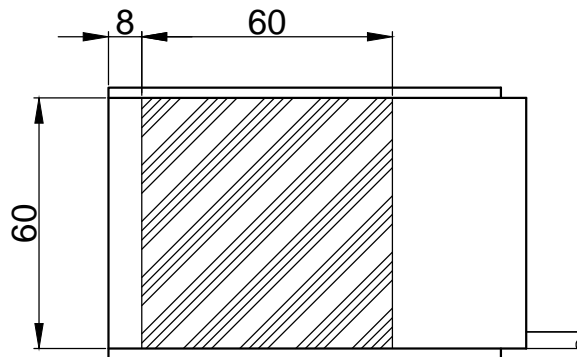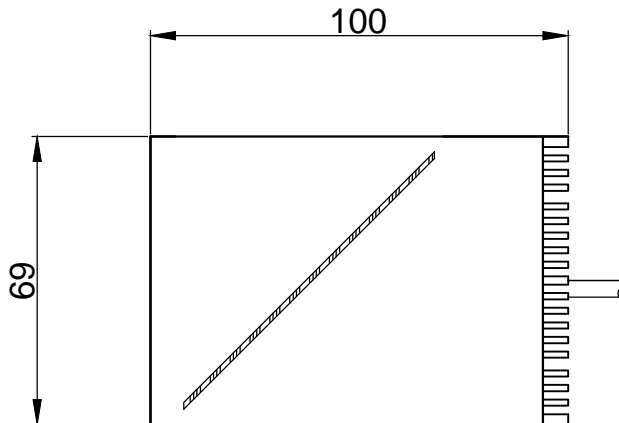

SPECIFICATIONS PARAMETER	
OPERATING VOLTAGE	DC24-26V
RATED CURRENT	IR, R / W, G, B, V 270/360mA
RATED POWER	IR, R / W, G, B, V 6.48/8.64W
PEAK CURRENT	IR, R / W, G, B, V 540/720mA
PEAK POWER	IR, R / W, G, B, V 12.96/17.28W
WAVELENGTH OF LIGHT	IR 850 nm
	R 620-625nm
	G 520-530nm
	B 465-470nm
	W 6500-7000K



PART NAME	HL-CL-60	DATE	2013-10-10
UNIT: mm	TITLE	DWN. BY	
	DRAWING LAYOUT	CHKD. BY	
		APPD. BY	
		DWG. NO	

1

2

3

4

5

6

7